



POWER YOUR EVENT

2026 EQUIPMENT CATALOG

©2026 All content in this document is the intellectual property of the company and may not be reproduced or distributed without prior written permission.

 Riyadh

 info@litonevent.com

 0510100009 / 0510100006

 www.litonevent.com

     /litonevent

SCAN FOR MORE




Liton Event is a full service audio and visual service provider

We provide integrated event support through the rental of advanced technical equipment including

LED screens, lighting systems, visual effects, and staging solutions.

Our specialized team also delivers technical support, supervision, and on-site operation to ensure smooth setup and execution for conferences, official events, exhibitions, concerts, festivals, and private celebrations.

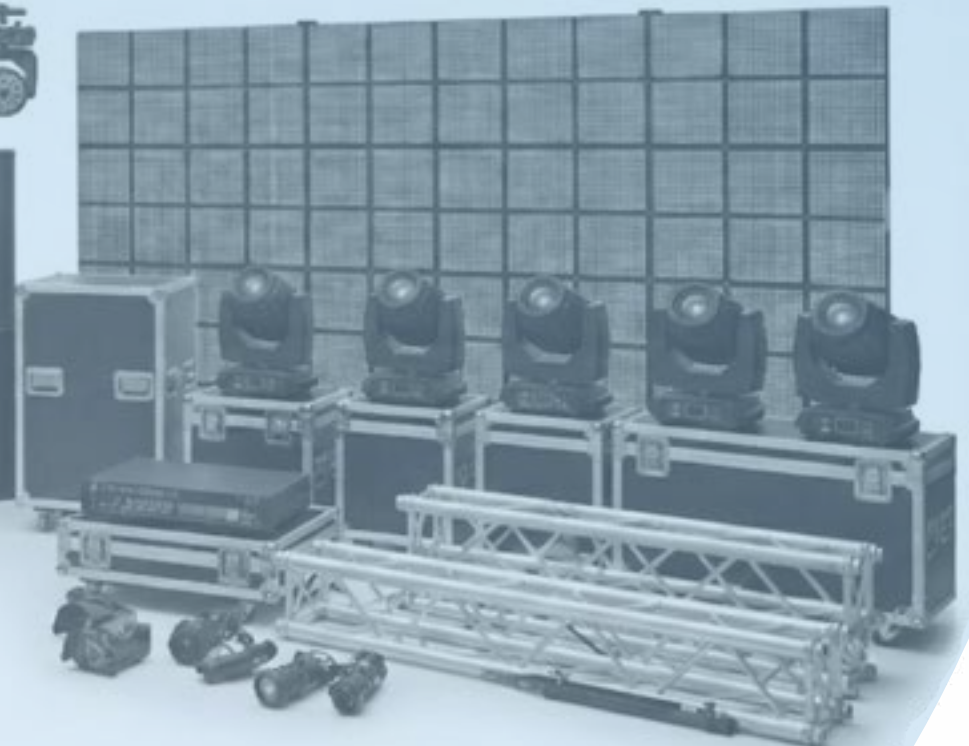

Production Services

A full range of services is delivered by a dedicated team providing professional audiovisual support for events.

Weddings & Graduations,
Concerts & Shows, Product
Launches, Corporate Events,
Exhibitions, Government Events,
Festivals, and Event Production.



Production Services

Lighting Systems

Professional event lighting solutions supported by modern lighting equipment and an experienced technical team to deliver reliable lighting setups for different types of events.

Rigging & Staging

Professional rigging and stage structures for indoor and outdoor events, with planning and installation handled by our technical team.

Video & LED Display Systems

The new standard in event production.

We provide complete video display solutions including high-definition displays and LED panels, along with live video services to deliver clear visuals and an engaging event experience.

Visual Effects

Stage visual effects including fog, CO₂, and special atmospheric effects used to enhance the visual experience during live events.



Equipment Rentals

We offer a comprehensive range of professional event production equipment available for rental for both indoor and outdoor events.

All equipment is regularly maintained and prepared by our technical team to ensure reliable performance and operational readiness, supported by professional technical service for proper setup and operation.



Video & LED Display Systems



P1.5 Indoor LED Display


Category	Specification
Model/ Name	P1.5 Indoor LED Display (RAYSHINE)
Pixel Pitch	1.538 mm
Module Size	320 × 160 mm
Cabinet Size	640 × 640 mm
Pixel Density	173,056 dots /m ²
Brightness	600 nits
Refresh Rate	3840 Hz
Viewing Angle	H140° / V140°
Input Voltage	AC100–240V, 50/60Hz
Power Consumption	Max 200W/m ²
Cabinet Weight	≤10.1 kg



Function Features

- High resolution LED display for indoor applications
- High refresh rate for smooth video and camera performance
- Uniform brightness and consistent color output
- Wide viewing angles for audience coverage
- Lightweight cabinet for easy installation and setup
- Modular design for flexible screen configurations
- Energy-efficient operation for long event usage
- Reliable RAYSHINE LED components
- Stable performance in continuous operation
- Suitable for conferences, exhibitions, and stage backdrops

P2.6 Outdoor LED Display

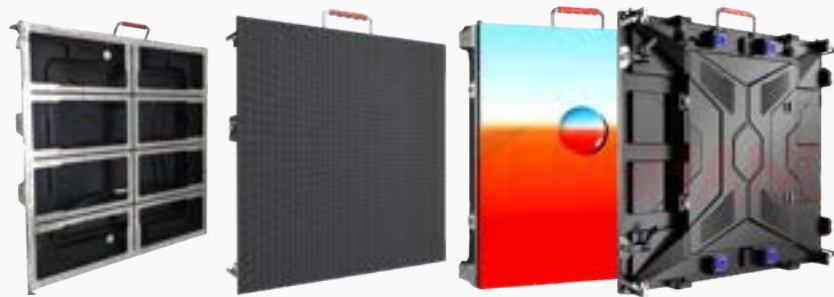

STRUCTURE

FRONT VIEW

LED MODULE


Function Features

- Outdoor LED display suitable for open-air events
- High brightness for daylight visibility
- High refresh rate for smooth video output
- Wide viewing angles for large audience coverage
- Adjustable color temperature for different environments
- Durable SMD1415 LED structure
- Stable performance under continuous operation
- High brightness and color uniformity
- Designed for stage, outdoor screens, and large displays

Category	Specification
Model/ Name	P2.6 Outdoor LED Display (SMD1415)
Pixel Pitch	2.604 mm
Module Size	250 × 250 mm
Module Resolution	96 × 96 dots
Pixel Density	147,400 dots/m ²
Refresh Rate	3840 Hz
Viewing Angle	H140° / V140°
Color Temperature	2000K – 9500K (Adjustable)
Brightness Uniformity	≥99%
Power Consumption	≤800W/m ²
Input Signal	≥60 fps

65" LED Display Screen (Floor Stand)

Category	Specification
Model/ Name	65" LED Display Screen (Floor Stand)
Screen Size	65 inch
Aspect Ratio	16:9
Resolution	1920 × 1080
Display Area	1428.5 × 803.5 mm
Brightness	450 cd/m ²
Contrast Ratio	1400:1
Refresh Rate	120 Hz
Color Display	16.77 Million Colors
Power Consumption	≤86.94W
Operating Temperature	0 – 50°C

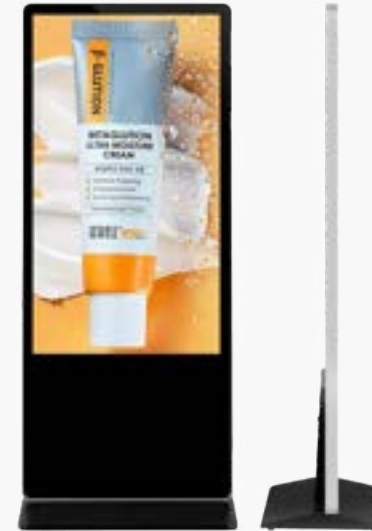

Function Features

- Large display size for better visibility
- Full HD resolution for clear content
- Smooth display with higher refresh rate
- Wide color range for vivid visuals
- Floor-standing design for flexible placement
- Suitable for advertising and information display
- Energy-efficient operation
- Stable performance for continuous use

LED Poster Display



Function Features

- Fine pixel pitch (P1.53) for sharp and detailed visuals
- Slim vertical LED poster format for premium display applications
- Foldable structure for easy transport and rental use
- High brightness suitable for indoor environments
- Wide viewing angle for consistent visibility
- Quick setup with integrated floor stand

Category	Specification
Model/ Name	LED Poster Display
Screen Size	65 inch
Pixel Pitch	P1.53
Resolution	1920 × 640
Display Area	162 × 64 cm
Brightness	450 cd /m ²
Installation	Floor Standing (Foldable)

55" LED Display Screen (Floor Stand)

Category	Specification
Model/ Name	55" LED Display Screen (Floor Stand)
Screen Size	55 inch
Aspect Ratio	16:9
Resolution	1920 × 1080
Display Area	1214.2 × 685 mm
Brightness	450 cd/m ²
Contrast Ratio	4000:1
Refresh Rate	60 Hz
Color Display	16.77 Million Colors
Power Consumption	≤62.1W
Operating Temperature	0 – 50℃



Function Features

- Full HD display for clear content presentation
- Wide color range for vibrant visuals
- Slim floor-standing design for easy placement
- Energy-efficient operation
- Suitable for exhibitions and information displays
- Stable performance for continuous use
- High contrast for clear readability
- Long lifespan up to 50,000 hours



Professional Lighting

Professional Lighting

LED 600W BSWF Moving Head

Category	Specification
Model/ Name	LED 600W BSWF Moving Head
Light Source	500W White LED
Power Consumption	550W
Voltage	AC110–240V, 50–60Hz
Control Protocols	DMX512, RDM, Master / Slave
Channel Modes	22CH
Pan Movement	540°
Tilt Movement	270°
Beam Angle	2.5° – 38°
IP Rating	IP20
Weight	22.5 kg



Function Features

- Beam, Spot & Wash with CMY Color Mixing
- Wide Zoom Range from 2.5° to 38°
- CMY + CTO Color System for precise color control
- Color Wheel with 12 colors + white
- Fixed Gobo Wheel (12 patterns + open)
- Rotating Gobo Wheel (7 patterns)
- Dual Prism System (6-facet & 8-facet)
- Electronic Strobe 0–30Hz
- Linear Dimming 0–100%
- Smooth Pan/Tilt with 16-bit precision
- LCD Display with touch & button control
- Enhanced Cooling with thermal protection
- Flicker-Free Output for professional use

Professional Lighting

480W Beam Moving Head



Function Features

- High-Intensity Beam Output for long-distance effects
- Color Wheel with 14 colors + white
- Fixed Gobo Wheel (11 patterns + open)
- Rotating Effect Wheel with dynamic effects
- Multi-Prism Effects (8-facet & honeycomb prism)
- Mechanical Dimming 0–100%
- Variable Speed Strobe Effects
- Automatic Reset Function for stable operation
- Smooth Pan/Tilt with 16-bit precision
- High-Precision Optical Lens system
- Efficient Cooling System with thermal protection

Category	Specification
Model/ Name	480W Beam Moving Head
Light Source	Osram Lamp (OSRAM 461)
Power Consumption	750W
Voltage	AC100–240V, 50–60Hz
Control Protocols	DMX512, RDM
Channel Modes	18CH
Pan Movement	540°
Tilt Movement	270°
Weight	20 kg

Professional Lighting

480W BSW Moving Head



Category	Specification
Model/ Name	480W BSW Moving Head
Light Source	440W Lamp
Power Consumption	600W
Voltage	AC110–240V, 50–60Hz
Control Protocols	DMX512, Master /Slave
Channel Modes	16 / 22CH
Pan Movement	540°
Tilt Movement	270°
Beam Angle	7° – 35°
Color Temperature	3200K – 7500K

Function Features

- Beam, Spot & Wash functionality in one fixture
- Adjustable Focus from short to long distance
- Color Wheel with 13 colors + white
- Fixed Gobo Wheel (11 patterns + open)
- Rotating Gobo Wheel (6 glass gobos)
- Additional Effect Wheel with dynamic effects
- Dual Prism System (8-facet & 16-facet)
- Electronic Dimming 0–100%
- Variable Speed Strobe with macro effects
- Smooth Pan/Tilt with 16-bit precision
- Built-in Fog Effect for soft beam enhancement

Professional Lighting

LED 400W BSW Moving Head



Function Features

- Beam, Spot & Wash functionality in one fixture
- Zoom Range from 9° to 36°
- Color Wheel with 9 colors + white
- Fixed Gobo Wheel (5 patterns + open + flow effect)
- Rotating Gobo Wheel (7 glass gobos)
- 4-Facet Prism with bidirectional rotation
- Smooth Pan/Tilt with 16-bit precision
- Electronic Strobe 0–30Hz with adjustable speed
- Linear Dimming 0–100%
- Built-in Programs with Master/Slave operation
- LCD Display with keypad control
- Enhanced Cooling System for stable operation

Category	Specification
Model/ Name	LED 400W BSW Moving Head
Light Source	250W LED
Power Consumption	400W
Voltage	AC110–240V, 50–60Hz
Control Protocols	DMX512, RDM, Master / Slave
Channel Modes	19 / 23CH
Pan Movement	540°
Tilt Movement	270°
Beam Angle	9° – 36°
IP Rating	IP20

Professional Lighting

380W Beam Moving Head

Category	Specification
Model/ Name	380W Beam Moving Head
Light Source	Beam Lamp
Power Consumption	250W
Voltage	AC100–240V, 50/60Hz
Control Protocols	DMX512, Master/Slave
Channel Modes	17 / 20CH
Pan Movement	540°
Tilt Movement	270°
Beam Angle	7° – 35°
Weight	22.5 kg



Function Features

- Narrow Beam Output for strong aerial effects
- Adjustable Zoom from 7° to 35°
- Color Wheel with 8 colors + white
- Fixed Gobo Wheel (11 patterns + open)
- Rotating Gobo Wheel (7 patterns + open)
- 3-Facet Prism with bidirectional rotation
- Smooth Pan/Tilt with 16-bit precision
- Electronic Strobe with adjustable speed
- Linear Dimming 0–100%
- Built-in Programs with Master/Slave operation
- LCD Display for easy control

Professional Lighting

380W BSW Moving Head



Function Features

- Beam, Spot & Wash functionality in one fixture
- Adjustable Zoom Range from 2.5° to 39°
- Color Wheel with 13 colors + white
- Fixed Gobo Wheel (13 patterns + open)
- Rotating Gobo Wheel (7 glass gobos)
- Linear Motorized Focus for precise control
- Smooth Mechanical Dimming 0–100%
- Dual Strobe Effects with adjustable speed
- Built-in Frost Effect for soft wash output
- LCD Touch Display with dual language interface

Category	Specification
Model/ Name	380W BSW Moving Head
Light Source	Yodn 17R 350W Lamp
Power Consumption	500W
Voltage	AC100–240V, 50/60Hz
Control Protocols	DMX512, Master/Slave
Channel Modes	16 / 24CH
Pan Movement	540°
Tilt Movement	270°
Beam Angle	2.5° – 39°
Color Temperature	7500K

Professional Lighting

LED 300W BSW Moving Head

Category	Specification
Model/ Name	LED 300W BSW Moving Head
Light Source	LED 300W
Power Consumption	250W
Voltage	AC100–240V, 50/60Hz
Control Protocols	DMX512, Master/Slave
Channel Modes	17 / 20CH
Pan Movement	540°
Tilt Movement	270°
Beam Angle	7° – 35°
Weight	kg 14.5



Function Features

- Beam, Spot & Wash functionality in one fixture
- Zoom Range from 7° to 35°
- Color Wheel with 8 colors + white
- Fixed Gobo Wheel (11 patterns + open)
- Rotating Gobo Wheel (7 patterns + open)
- 3-Facet Prism with bidirectional rotation
- Smooth Pan/Tilt with 16-bit precision
- Built-in Programs with Master/Slave operation
- LCD Display for easy control and navigation

Professional Lighting

Mini 280W Beam Moving Head



Function Features

- Narrow Beam Output for sharp aerial effects
- Adjustable Beam Angle for flexible coverage
- Color Wheel with 14 colors + open
- Fixed Gobo Wheel with rotating effects
- Prism System (8 + 16 facets combination)
- Dual Strobe Effects with variable speed
- Linear Focus for precise beam control
- Smooth Dimming 0–100%
- Built-in Programs with Master/Slave operation
- LCD Display with multilingual interface

Category	Specification
Model/ Name	Mini 280W Beam Moving Head
Light Source	230W Lamp
Power Consumption	400W
Voltage	AC100–240V, 50–60Hz
Control Protocols	DMX512, Master / Slave, Auto Mode
Channel Modes	16 / 20CH
Beam Angle	3° – 29°
Color Temperature	8500K / 4500K / 3200K
Weight	12.4 kg

Professional Lighting

37×40W Moving Head Bee Eye

Category	Specification
Model/ Name	37×40W Moving Head Bee Eye
Light Source	37 × 40W RGBW LEDs
Power Consumption	1560W
Voltage	AC100–240V, 50–60Hz
Control Protocols	DMX512, RDM, Master / Slave, Sound Control
Channel Modes	21 / 22 / 35 / 36 / 111 / 148CH
Pan Movement	540°
Tilt Movement	220°
Beam Angle	4° – 55°



Function Features

- Beam & Wash Output with wide coverage
- RGBW Color Mixing with smooth transitions
- Adjustable Zoom for flexible beam control
- Color Temperature Range 2500K–10000K
- High-Precision Optical System for consistent output
- Built-in Effect Macros for dynamic lighting scenes
- Electronic Strobe 1–25Hz
- Electronic Dimming with multiple curves
- Linear Motorized Zoom for smooth transitions
- Sound Control Mode for reactive lighting

Professional Lighting

19×40W Moving Head Bee Eye



Function Features

- Beam & Wash Output for versatile stage use
- RGBW Color Mixing with stable output
- Motorized Zoom with autofocus function
- Wide Beam Range from 2° to 60°
- Built-in CTO Control for color temperature adjustment
- Electronic Strobe 0.3–25Hz with multiple modes
- Smooth Electronic Dimming with gamma curves
- Flicker-Free Output suitable for video shooting
- High-Precision Positioning with auto correction
- Silent Motor Operation with adjustable speed

Category	Specification
Model/ Name	19×40W Moving Head Bee Eye
Light Source	19 × 40W RGBW LEDs (OSRAM)
Power Consumption	1000W
Voltage	AC100–240V, 50–60Hz
Control Protocols	DMX512, Master/Slave, Sound Control
Pan Movement	540°
Dimming	0–100%
Tilt Movement	270°
Beam Angle	2° – 60°

Professional Lighting

19×30W Moving Head Bee Eye

Category	Specification
Model/ Name	19×30W Moving Head Bee Eye
Light Source	19 × 30W RGBW LEDs (OSRAM)
Power Consumption	1000W
Voltage	AC100–240V, 50–60Hz
Control Protocols	DMX512, Master/Slave, Sound Control
Dimming	0–100%
Pan Movement	540°
Tilt Movement	270°
Beam Angle	4° – 55°



Function Features

- Beam & Wash Output with wide coverage
- RGBW Color Mixing with stable output
- Motorized Zoom with autofocus function
- Wide Beam Range from narrow to wide spread
- Built-in CTO Control for color temperature adjustment
- Electronic Strobe 0.3–25Hz with multiple modes
- Smooth Electronic Dimming with gamma curves
- Flicker-Free Output suitable for video shooting
- High-Precision Positioning with accurate movement
- Adjustable Pan/Tilt Speed with auto repositioning

Professional Lighting

7×60W Moving Head Bee Eye



Function Features

- Beam & Wash Output for stage applications
- RGBW Color Mixing with smooth transitions
- Adjustable Zoom for flexible beam control
- Color Temperature Range 2500K–10000K
- High-Precision Optical System for clear projection
- Built-in Effect Macros (static & dynamic)
- Electronic Strobe 1–25Hz
- Uniform Output without flicker

Category	Specification
Model/ Name	7×60W Moving Head Bee Eye
Light Source	7 × 60W RGBW high-brightness LEDs
Power Consumption	400W
Voltage	AC100–240V, 50–60Hz
Control Protocols	DMX512, RDM, Master / Slave, USB, ArtNet
Channel Modes	23CH / 35CH / 51CH (expandable)
Pan Movement	540°
Tilt Movement	220°
Beam Angle	4° – 55°

Professional Lighting

120×3W LED PAR Light (RGBW)



Category	Specification
Model/ Name	120×3W LED PAR Light (RGBW)
Light Source	120 × 3W RGBW LEDs
Power Consumption	360W
Voltage	AC100—240V, 50/60Hz
Control Protocols	DMX512, Master/Slave, Sound Control
Channel Modes	4 / 8CH
Beam Angle	25° (Optional: 15° / 45° / 60°)
Weight	8 kg

Function Features

- High-Density LED Output for strong wash effect
- RGBW Color Mixing with wide color range
- Wide Coverage suitable for large stage areas
- Multiple Beam Angle Options for flexible setup
- Linear Dimming for smooth intensity control
- Built-in Strobe Effect for dynamic scenes
- DMX Control with multiple operation modes
- Robust Design suitable for event environments

Professional Lighting

72×3W LED PAR Light (RGBW)



Function Features

- Balanced Output for medium-size stage applications
- RGBW Color Mixing with smooth transitions
- Multiple Beam Angle Options for flexible coverage
- Uniform Light Distribution with optimized lens design
- Linear Dimming for smooth intensity control
- Built-in Strobe Effect (1–25Hz)
- Digital Display for easy configuration
- Energy-efficient design with stable performance

Category	Specification
Model / Name	72×3W LED PAR Light (RGBW)
Light Source	72 × 3W RGBW LEDs
Power Consumption	300W
Voltage	AC100–240V, 50/60Hz
Control Protocols	DMX512, Master/Slave, Auto Mode
Channel Modes	10CH
Beam Angle	15° / 25° / 45°
Dimming	0–100%
Weight	4.5 kg

Professional Lighting

54×3W LED PAR Light (IP Rated)

Category	Specification
Model/ Name	54×3W LED PAR Light (IP Rated)
Light Source	54 × 3W LEDs (RGBW)
Power Consumption	180W
Voltage	AC100–240V, 50/60Hz
Control Protocols	DMX512, Auto Mode, Sound Control
Channel Modes	8CH
Beam Angle	25° (Optional: 15° / 45° / 60°)
IP Rating	Waterproof (Outdoor Use)
Weight	2.8 kg



Function Features

- Outdoor-Ready PAR Light for events and installations
- RGBW Color Mixing with balanced output
- Multiple Beam Angle Options for flexible coverage
- Lightweight Design for easy rigging
- Stable Performance with constant current driver
- Smooth Dimming and dynamic color effects
- DMX Control with multiple operation modes
- Durable Aluminum Housing for outdoor conditions

Professional Lighting

24×12W LED PAR Light (RGBW)



Function Features

- RGBW Color Mixing with smooth output
- Compact PAR Design for stage and event use
- Wide Wash Coverage for uplighting and backlighting
- Linear Dimming for smooth brightness transitions
- Built-in Strobe Effects with multiple modes
- Lightweight Aluminum Housing with good heat dissipation
- Stable Performance with constant current control
- LCD Digital Display for easy setup

Category	Specification
Model/ Name	24×12W LED PAR Light (RGBW)
Light Source	24 × 12W RGBW LEDs
Voltage	AC90–240V, 50/60Hz
Control Protocols	DMX512, Master/Slave, Auto Mode
Channel Modes	8CH
Dimming	0–100%
Strobe	1–20Hz
IP Rating	IP20

4×60W Double-Sided Moving Head Light

Category	Specification
Model/ Name	4×60W Double-Sided Moving Head Light
Light Source	4 × 60W RGBW LEDs (Beam Head)
Additional Source	Pixel Strobe: 96 × 3W CW + 108 × 0.5W RGB
Additional Beam	9 × 10W CW LEDs
Voltage	AC180–240V, 50/60Hz
Power Consumption	400W
Control Protocols	DMX512, RDM, Master/Slave, Sound Control
Pan Movement	Continuous Rotation (16-bit)
Tilt Movement	Continuous Rotation (16-bit)
Beam Angle	3° – 36°



Function Features

- Dual-Sided Design for multi-directional effects
- Beam + Pixel Strobe combination in one fixture
- RGBW Beam Output with strong color mixing
- High-Density Pixel Strobe panel for visual effects
- Continuous Pan/Tilt rotation for dynamic movement
- Adjustable Zoom Range from 3° to 36°
- Linear Dimming 0–100% with flicker control
- Multiple Control Modes including DMX & Sound
- Suitable for stage effects and visual shows

Professional Lighting

5KW Xenon Searchlight (Outdoor)



Function Features

- High-Intensity Beam for long-distance projection
- Outdoor Ready Design (IP65)
- Continuous Operation up to 12 hours
- Multi-Color Options available
- Heavy-Duty Construction for outdoor use
- Suitable for large-scale outdoor events and landmarks
- Delivered with flight case / wooden case options

Category	Specification
Model/ Name	5KW Xenon Searchlight (Outdoor)
Light Source	Xenon Searchlight
Power Consumption	5000W
Voltage	220V
IP Rating	IP65
Lighting Duration	6–12 hours
Weight	46 kg

400W LED Audience Light (Blinder)

Category	Specification
Model/ Name	400W LED Audience Light (Blinder)
Light Source	4 × 100W LED
Power Consumption	400W
Voltage	AC90–240V, 50/60Hz
Control Protocols	DMX512, Master / Slave, Sound Control
Channel Modes	8 / 12CH
Beam Angle	60°
Color Temperature	3200K – 5600K
IP Rating	IP20
Weight	8 kg



Function Features

- High-Output Blinder Effect for audience lighting
- Wide Beam Angle (60°) for full coverage
- Adjustable Color Temperature (Warm to Neutral White)
- Multiple Lighting Modes (CW / WW / Bi-Color / RGBW optional)
- Strong Output Range up to 20 meters
- Linear Dimming for smooth brightness control
- Durable Aluminum Housing for stage use
- Suitable for stage, audience wash, and event lighting

200W LED Audience Light (Blinder)



Function Features

- High-output blinder effect for audience lighting
- Wide beam angle (60°) for effective coverage
- Adjustable color temperature (warm to cool white)
- Multiple control modes (DMX / Master-Slave / Sound)
- Compact design for smaller setups
- Suitable for stage and event lighting

Category	Specification
Model / Name	200W LED Audience Light (Blinder)
Light Source	2 × 100W LED
Power Consumption	200W
Voltage	AC90–240V, 50/60Hz
Control Protocols	DMX512, Master / Slave, Sound Control
Channel Modes	8CH
Beam Angle	60°
Color Temperature	3200K – 6000K
IP Rating	IP20

Professional Lighting

1000W LED Strobe & Pixel Bar

Category	Specification
Model/ Name	1000W LED Strobe & Pixel Bar
Light Source	144 White LEDs (Strobe) + 480 RGB LEDs
Power Consumption	1000W
Voltage	AC100–240V, 50/60Hz
Control Protocols	DMX512, RDM, Auto Mode
Channel Modes	7 / 14 / 42CH
Dimming	0–100%
Strobe Rate	0.3–20Hz
Tilt Movement	270°



Function Features

- Hybrid Fixture (Strobe + Pixel RGB Effect)
- High-Intensity White Strobe Output
- RGB Pixel Mapping for dynamic visual effects
- Wide Coverage for stage and large events
- Adjustable Strobe Speed up to 20Hz
- Linear Dimming for smooth transitions
- Multiple DMX Channel Modes for advanced control
- LCD Display for easy operation
- Suitable for concerts, clubs, and live shows

960 LED Pixel Strobe Bar (RGB + White)



Function Features

- Hybrid Pixel + Strobe Effect in one fixture
- High-Density RGB Pixel Mapping for visual patterns
- Dedicated White LEDs for strong strobe output
- Multi-Segment Control for dynamic effects
- Smooth 32-bit Dimming for precise control
- Adjustable Strobe Speed up to 30Hz
- Multiple DMX Modes for flexible programming
- Suitable for stage, concerts, and visual shows

Category	Specification
Model/ Name	960 LED Pixel Strobe Bar (RGB + White)
Light Source	864 RGB LEDs + 96 White LEDs
Power Consumption	280W
Voltage	AC100–240V, 50/60Hz
Control Protocols	DMX512, RDM, Master/Slave, Sound Control
Channel Modes	CH04 / CH11 / CH32 / CH39
Dimming	0–100% (32-bit)
Strobe Rate	1–30Hz
Operating Temperature	-30°C to 50°C

LED Wash Light (Static & Moving Head)

Product Options	Static Version (Fixed Panel)
	Moving Head Version (Adjustable Tilt 45°–145°)

Category	Specification
Model/ Name	LED Wash Light (Static & Moving Head)
Light Source	60 × 10W RGBW LEDs
Power Consumption	600W
Voltage	AC90–240V, 50–60Hz
Control Protocols	DMX512, Master / Slave, Sound Control
Channel Modes	4 / 6 / 9CH
Beam Angle	25°
Dimming	0–100%
Tilt Movement	45° – 145° (Manual)



Function Features

- Available in static and moving head versions with same lighting performance
- High brightness RGBW color mixing
- Multiple control modes for flexible operation
- Smooth linear dimming for professional lighting effects
- Strobe effect (1–25 times/sec)
- Wide voltage compatibility
- Efficient heat dissipation with cooling system
- Suitable for stage, events, and installations

Professional Lighting

600W LED Flood Light (IP65)



Function Features

- High-Output Flood Lighting for large areas
- RGBW Color Mixing for architectural and stage use
- Outdoor Ready Design (IP65)
- Wide Coverage with selectable beam angles
- Linear Dimming 0–100%
- Strobe Effect 1–25Hz
- Durable Die-Cast Aluminum Construction
- Adjustable Tilt for flexible positioning
- Suitable for outdoor events, facades, and large venues

Category	Specification
Model / Name	600W LED Flood Light (IP65)
Light Source	120 × 10W RGBW LEDs
Power Consumption	600W
Voltage	AC100–240V, 50–60Hz
Control Protocols	DMX512, Master/Slave
Channel Modes	8 / 16CH
Beam Angle	25° / 40°
Tilt Adjustment	0° – 180° (Manual)
IP Rating	IP65
Weight	32 kg

7×7 LED Wall Light



Function Features

- Pixel-mapped LED matrix for visual effects
- RGB + warm white color combination
- Multiple control modes including RDM support
- Built-in effects (chasing, strobe, flow, wash)
- High channel flexibility for advanced programming
- Suitable for stage backdrops and visual displays

Category	Specification
Model/ Name	7×7 LED Wall Light
Voltage	AC100—240V, 50 /60Hz
Power	200W
Light Source	441 × RGB LEDs + 49 × Warm White LEDs
Control Mode	DMX512, Auto, Master-Slave, Sound, RDM
Channels	CH04 / CH19 / CH68 / 196CH / 460CH / 1372CH
Dimming	16-bit linear dimming (0—100%)
Strobe Frequency	1—30Hz
IP Rating	IP20

24 LED Beam Wash Pixel Bar

Category	Specification
Model/ Name	24 LED Beam Wash Pixel Bar
Light Source	24 × 5W White LEDs + RGB Pixel LEDs
Power Consumption	300W
Voltage	AC100–240V, 50/60Hz
Control Protocols	DMX512, RDM, Master/Slave, Sound Control
Channel Modes	CH5 / CH11 / CH112
Dimming	0–100% (32-bit)
Strobe Rate	1–30Hz
IP Rating	IP20
Weight	4.35 kg



Function Features

- Hybrid Fixture (Beam + Wash + Pixel Effects)
- Individual Pixel Control for dynamic effects
- High-Brightness White Beam output
- RGB Pixel Layer for visual animations
- Multi-Channel DMX Modes for advanced programming
- Smooth 32-bit Dimming for precise control
- Adjustable Strobe Effect up to 30Hz
- Compact Bar Design for stage and rigging setups
- Suitable for concerts, stage shows, and visual effects

Professional Lighting

follow spot light



Function Features

- Focused Spot Beam for long-throw applications
- Adjustable Beam Angle for precise targeting
- High Color Temperature for clear visibility
- Strong Output suitable for stage highlighting
- Smooth Zoom Control for beam adjustment
- Stable Performance for continuous operation
- Lightweight Aluminum Body for easy handling
- Designed for Follow Spot applications on stage

Category	Specification
Model/ Name	1000W Follow Spot
Light Source	350W Bulb
Power Supply	AC100—240V, 50/60Hz
Color Temperature	7500K
Luminous Flux	16,500 lm
Beam Angle	4.5° – 10°
Zoom Type	Manual Zoom

6-Head RGB Laser Bar

Category	Specification
Model/ Name	6-Head RGB Laser Bar
Laser Power	3000mW (6 × 500mW)
Power Consumption	1000W
Voltage	AC100–230V, 50–60Hz
Laser Source	Semiconductor Laser
Wavelength	638nm
Control Protocols	DMX512, Master/Slave, Sound Control
DMX Channels	18CH
Scanning Angle	Up to 180°
Operating Temperature	20°C to 45°C-



Function Features

- Multi-Head Laser Output (6 units) for wide coverage
- RGB Laser Effects for dynamic visuals
- Sky Beam & Line Effects
- Built-in Laser Strobe Effect
- Adjustable Scanning Angle with motor control
- Sound-to-Light Synchronization
- Multiple Control Modes for flexible operation
- Suitable for indoor venues and stage setups

12×60W LED Gold Strobe



Function Features

- Strobe, beam, and wash in one fixture
- High output for stage and event use
- RGBW + dual white LED combination
- Adjustable strobe speed (1–30Hz)
- Smooth 32-bit dimming
- DMX & RDM control support
- Suitable for concerts and live shows

Category	Specification
Model/ Name	12×60W LED Gold Strobe
Light Source	12 × 60W RGBW LEDs + 432 Warm + 432 Cool White LEDs
Power	800W
Control Mode	DMX512 / Auto / Master-Slave / Sound / RDM
Channels	CH29 / CH62 / CH170 / CH254 / CH308 / CH332
Dimming	32-bit 0–100% Linear
Strobe Frequency	1–30 Hz
Input Voltage	AC100–240V, 50/60Hz
IP Rating	IP20
Weight	26.5 kg

Professional Lighting

12×40W Snake Light

Category	Specification
Model/ Name	12×40W Snake Light
Light Source	12 × 40W RGBW LEDs + 144 × 0.3W RGB LEDs
Power	500W
Control Mode	DMX512 / Auto / Master-Slave / Sound / RDM
Channels	CH24 / CH36 / CH60 / CH72 / CH144
Dimming	32-bit 0–100% Linear
Strobe Frequency	1–30 Hz
Input Voltage	AC100–240V, 50/60Hz
IP Rating	IP20
Dimensions	100 × 30 × 13 cm



Function Features

- Moving Y-axis with dynamic beam effects
- Beam, strobe, and auxiliary lighting in one
- RGBW LEDs with additional pixel lighting
- Smooth 32-bit dimming control
- Adjustable strobe speed (1–30Hz)
- DMX & RDM control support
- Suitable for concerts and stage shows

Professional Lighting

10×80W LED Wall Light



Function Features


- High-output warm white audience lighting
- Beam, strobe, and color effects combined
- RGB auxiliary LEDs for enhanced visuals
- Smooth 32-bit dimming control
- Adjustable strobe speed (1–30Hz)
- DMX & RDM control support
- Suitable for stage and audience lighting

Category	Specification
Model / Name	10×80W LED Wall Light
Light Source	10 × 80W Warm White LEDs + 180 RGB LEDs
Control Mode	DMX512 / Auto / Master-Slave / Sound / RDM
Channels	CH4 / CH15 / CH24
Dimming	32-bit 0–100% Linear
Strobe Frequency	1–30 Hz
Input Voltage	AC100–220V, 50/60Hz
IP Rating	IP20
Weight	18.5 kg

Professional Lighting

LASER 3IN1 RGB Laser Light

Category	Specification
Model/ Name	LASER 3IN1 RGB Laser Light
Light Source	RGB Laser ×6 + 480 RGB LEDs + 8 × 5W Amber LEDs
Power	180W
Laser Color	RGB
Control Mode	DMX512 / Auto / Sound / Master-Slave
Channels	31 / 59 CH
Scanning	X-axis infinite / Y-axis 0–120°
Control Signal	TTL Modulation
Input Voltage	AC95–250V, 50/60Hz
IP Rating	Indoor Use
Weight	14.5 kg

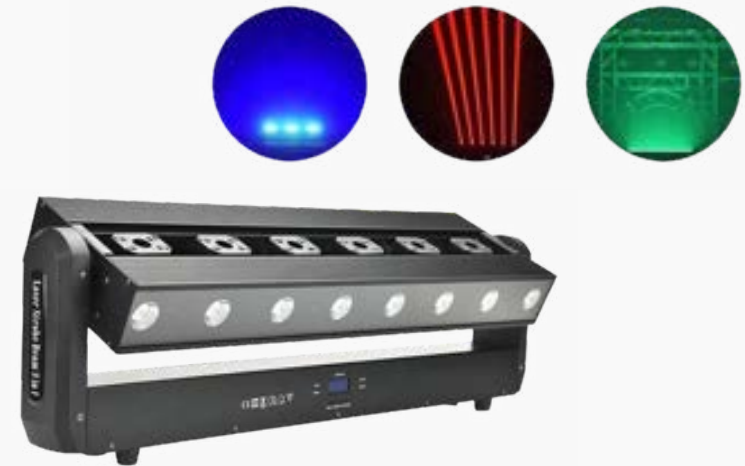

Function Features

- 3-in-1 effect: laser, beam, and RGB lighting
- Full RGB laser output for dynamic visuals
- Built-in pixel LED effects
- Wide scanning range for stage coverage
- Multiple control modes including DMX
- High-speed scanning with stepper motor
- Suitable for concerts and live events

6+6 Moving Head + Laser Light



Function Features

- Dual effect: Moving heads + laser in one unit
- RGBW beams with additional laser effects
- Multiple channel modes for flexible programming
- Smooth dimming with stable performance
- Multi control options (DMX / Sound / Auto)
- Compact design suitable for stage and DJ setups

Category	Specification
Model/ Name	6+6 Moving Head + Laser Light
Light Source	6 × 40W RGBW LEDs + 6 × 10W LEDs
Power Consumption	Power Consumption
Voltage	AC90–240V, 50/60Hz
Control Modes	DMX512 / Auto / Sound / Master-Slave
Channel Modes	16 / 24 / 29 / 47 CH
Dimming	0–100% Smooth Dimming
Product Size	Product Size
Applications	Bars / Clubs / Stage / Events / Hotels

Professional Lighting

5×80W Moving Beam Light




Category	Specification
Model/ Name	5×80W Moving Beam Light
Light Source	5 × 60W + 6 × 10W RGBW LEDs
Power Consumption	380W
Voltage	AC90–240V, 50/60Hz
Control Modes	DMX512 / Auto / Sound / Master-Slave
Movement	X: 540° / Y: 120°
Size	76 × 18.5 × 30.5 cm
Weight	12 kg

Function Features

- Multi-head moving beam effect for dynamic shows
- RGBW LED output with rich color mixing
- Wide movement range for flexible stage coverage
- Built-in programs with sound-activated effects
- Adjustable high-speed strobe (1–25 flashes/sec)
- Multiple control modes for easy operation
- Durable housing (aluminum + engineering plastic)
- Suitable for clubs, weddings, and stage performances

Moving Strobe Light (RGB Matrix)

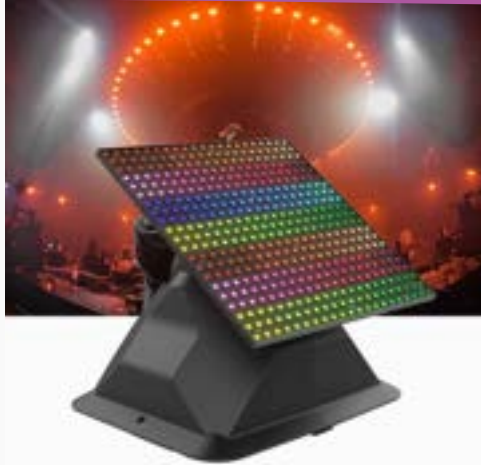

Function Features

- Moving head strobe with RGB matrix effect
- Pixel-style lighting for dynamic visual effects
- High-speed strobe with adjustable frequency
- Full RGB color mixing (wash + strobe effects)
- Multiple channel modes for advanced programming
- Supports RDM for remote configuration
- Smooth 32-bit linear dimming (0–100%)
- Ideal for stage, clubs, and visual shows

Category	Specification
Model/ Name	Moving Strobe Light (RGB Matrix)
Light Source	441 × 5050 RGB LEDs
Power Consumption	90W
Voltage	AC100–240V, 50/60Hz
Control Modes	DMX512 / Auto / Sound / Master-Slave / RDM
Channel Modes	CH1 / CH18 / CH154 / CH162
Strobe Frequency	1–30Hz
IP Rating	IP20

Professional Lighting

Long Strobe Light

Category	Specification
Model/ Name	Long Strobe Light
Light Source	240 × 0.5W White LEDs + 480 × 0.3W RGB LEDs
Power Consumption	350W
Voltage	AC100–240V, 50/60Hz
Control Modes	DMX512 / Auto / Master-Slave / RDM
Channel Modes	CH4 / CH16 / CH168
Strobe Frequency	1–30Hz
Size	100 × 10 × 15 cm



Function Features

- 12-channel independent power control
- High-load capacity suitable for stage equipment
- Dual protection system (overload + short circuit)
- Built-in main leakage protection switch
- Real-time voltage monitoring (3-phase display)
- Stable and safe power distribution
- Designed for professional stage lighting systems
- Suitable for concerts, theaters, and large events

Professional Lighting

8×12W LED BAR waterproof



Function Features

- Triple flame output for wider stage coverage
- Suitable for stage and outdoor effects
- Fast response flame effect
- Compact structure for easy placement
- Designed for synchronized show control

Category	Specification
Model/ Name	8×12W LED BAR waterproof
Input voltage	AC90—240V, 50—60Hz
Total power	200W
Light source	18 × 12W LED (4-in-1)
LED angle	30° (±5°)
Throwing distance	10 – 20 meters
Controls	DMX512, master-slave, auto mode
DMX Channel	8 channels
Waterproof rating	IP20

Professional Lighting

400W LED Profile Spot Light

Category	Specification
Model/ Name	400W LED Profile Spot Light
Light Source	350W COB LED
Power Consumption	400W
Voltage	AC100–240V, 50–60Hz
Control Protocols	DMX512, RDM, Manual Control
Channel Modes	1CH (CCT) / 6CH (RGBW)
Beam Angle	5° / 10° / 19° / 26° / 36° / 50°
Color Temperature	3200K / 5600K
Dimming	0–100%
Strobe	0–30Hz
IP Rating	IP20
Weight	11.15 kg



Function Features

- Precision Profile Spot for stage and theater lighting
- Interchangeable Beam Angles for flexible projection
- High-Quality COB LED with consistent output
- Adjustable Color Temperature (Warm / Cool White)
- Sharp Beam Control for accurate lighting shaping
- Smooth Linear Dimming for fade transitions
- Suitable for projection, highlighting, and stage focus
- Durable Aluminum Housing with efficient cooling
- TFT Display with touch controls for easy operation

400W LED Logo Projector (IP65)



Function Features

- High-Output Logo Projection for branding and events
- Adjustable Focus and Beam Angle for precise projection
- Rotating Gobo System with multiple logo slots
- Sharp Image Projection with high brightness
- Suitable for indoor and outdoor use (IP65)
- Smooth Dimming for controlled intensity
- Multiple Control Modes (DMX / Manual)
- Durable Aluminum Housing for long-term use
- Ideal for buildings, entrances, and event branding

Category	Specification
Model / Name	400W LED Logo Projector (IP65)
Light Source	1 × LED
Power Consumption	400W
Voltage	AC110–240V, 50–60Hz
Control Protocols	DMX512, Master / Slave, Manual
Channel Modes	8CH
Beam Angle	4° – 60°
Color Temperature	10000K
Dimming	0–100%
0–100%	1–20Hz
IP65	IP65
Weight	18 kg

Professional Lighting

6×2W Laser Light



Category	Specification
Model/ Name	6×2W RGB Laser Light
Laser Power	6 × 2W (RGB)
Voltage	AC110—220V, 50/60Hz
Control Modes	DMX512 / Auto / Sound / Master-Slave
Scanning System	20K high-speed galvanometer
Beam Angle	20°
Size	960 × 170 × 150 mm
Weight	16.5 kg

Function Features

- RGB full-color laser output (Red / Green / Blue)
- High-speed scanning for smooth projection
- Built-in animation programs (patterns & graphics)
- Multiple effects: beam, lines, graphic shapes
- DMX control for advanced programming
- Auto and sound-activated operation modes
- Suitable for clubs, stages, and live events
- Long bar design for wide coverage

Professional Lighting

6 head RGB LASER



Function Features

- Multi-color RGB laser output
- Beam and graphic laser effects
- High-speed scanning system
- Multiple control modes (DMX / Sound)
- Compact linear design for stage setup
- Suitable for clubs and live shows

Category	Specification
Model/ Name	6 head RGB LASER
Laser Source	Red 300mW ×23 / Green 100mW ×3 / Blue 500mW ×3
Control Mode	DMX / Auto / Sound / Master-Slave
Effects	Beam / Graphics / Animation Effects
Scanning System	High-speed motor scanning
Input Voltage	AC110—240V, 50/60Hz
Dimensions	95 × 16 × 9.5 cm
Packaging Size	97 × 35 × 25 cm
IP Rating	Indoor Use

Moving RGB Laser Light (6 Head Laser)

Category	Specification
Model/ Name	Moving RGB Laser Light (6 Head Laser)
Laser Source	RGB 3-in-1 Laser (6 × 500mW)
Power Consumption	80W
Voltage	AC110–220V, 50/60Hz
Control Modes	Control Modes
Channel Modes	15 / 27 CH
Movement	X: 540° / Y: 180° / Z: Infinite Rotation
Strobe Frequency	1–30Hz
Working Temperature	-20°C ~ 50°C
IP Rating	IP Rating
IP33	Aluminum + Plastic
Weight	7.2 kg
Lifespan	Lifespan
Installation	Installation



Function Features

- Multi-color RGB laser output
- Beam and graphic laser effects
- High-speed scanning system
- Multiple control modes (DMX / Sound)
- Compact linear design for stage setup
- Suitable for clubs and live shows

Professional Lighting

10W Moving Laser Light (Full Color)



Function Features

- Full-Color RGB Laser Output
- High-Speed Scanning for sharp beam effects
- Moving Head Design for dynamic projections
- Multiple Effects (lines, 3D patterns, animations)
- Supports Computer Control & Laser Software
- Sound & Light Synchronization capability
- Rotating Beam Effects with precise positioning
- Suitable for indoor shows, concerts, and clubs
- Ideal for large venues and visual performances

Category	Specification
Model/ Name	10W Moving Laser Light (Full Color)
Laser Power	10W (RGB: 3W Red / 3W Green / 4W Blue)
Voltage	AC100–230V, 50–60Hz
Laser Source	Semiconductor Laser
Control Protocols	DMX512, Master/Slave
Channel Modes	29 / 46CH
Scan System	High-speed Galvo (DT20/DT30)
Pan Movement	540°
Tilt Movement	270°
Operating Range	Up to 40m
Operating Temperature	-20°C to 45°C

10W Full-Color Laser System (Indoor)

Category	Specification
Model/ Name	10W Full-Color Laser System (Indoor)
Laser Power	10W (R: 3W / G: 3W / B: 4W)
Power Consumption	300W
Voltage	AC100–230V, 50/60Hz
Laser Source	Semiconductor RGB Laser
Wavelength	450nm / 520nm / 638nm
Control Protocols	DMX512, ILDA, Master/Slave, Sound Control
Modulation	TTL / Analog
Operating Temperature	-20°C to 45°C



Function Features

- Full-Color RGB Laser Output for visual shows
- High-Speed Scanning System (DT45)
- Sharp Line & 3D Laser Effects
- Computer Control via ILDA (QuickShow compatible)
- Sound-to-Light Synchronization
- Multiple Control Modes including DMX & Bluetooth
- Supports Text, Animation & Graphic Projection
- Stable Indoor Operation for event environments

Professional Lighting

30W Full-Color Laser System (IP65)



Function Features

- High-Power 30W RGB Laser Output
- Outdoor Ready Design (IP65)
- High-Speed Scanning System (DT50)
- Full-Color Beam & 3D Line Effects
- Computer Control via ILDA Software
- Supports Animation, Text & Graphic Projection
- Sound-to-Light Synchronization
- Multiple Control Options including DMX & Bluetooth
- Stable Performance for long-duration operation
- Suitable for large-scale outdoor shows

Category	Specification
Model/ Name	30W Full-Color Laser System (IP65)
Laser Power	30W (R: 8W / G: 10W / B: 12W)
Power Consumption	1000W
Voltage	AC100–230V, 50/60Hz
Laser Source	Semiconductor RGB Laser
Wavelength	450nm / 520nm / 638nm
Control Protocols	DMX512, ILDA, Master / Slave, Bluetooth
Modulation	TTL / Analog
IP Rating	IP65
Operating Temperature	20°C to 45°C-

Professional Lighting

6 Head Moving Fan Light

Category	Specification
Model/ Name	6 Head Moving Fan Light
Light Source	6 × 40W COB LEDs + RGB Ring LEDs
Power	300W
Control Mode	DMX512 / Auto / Sound / Master-Slave
Dimming	0–100% Smooth
Beam Angle	25° – 45°
Input Voltage	AC90–240V, 50/60Hz
Movement	Multi-head fan rotation
IP Rating	Indoor Use



Function Features

- Multi-head rotating fan lighting effect
- COB LEDs with RGB ring lighting
- Smooth dimming with dynamic movement
- Multiple control modes (DMX / Sound / Auto)
- Flexible channel modes for programming
- Suitable for stage and live shows



Lighting Power Control

24CH Dimmer Pack (Silicon Box)



Function Features

- 24-channel independent power distribution
- High-capacity output for large stage setups
- Dual protection (overload + short circuit)
- Built-in main breaker for safety control
- Real-time voltage and current monitoring
- Stable and reliable performance
- Suitable for large events and professional lighting systems
- Heavy-duty design for continuous operation

Category	Specification
Model/ Name	24CH Dimmer Pack (Silicon Box)
Power Supply	Three-phase 5-wire, 50Hz
Input	63A 5-pin plug
Output	24 × 16A (3-pin)
Channels	24 CH
Protection	125A main switch + overload & short circuit protection
Monitoring	Voltage / Current display (3-phase A/B/C)
Size	650 × 580 × 600 mm


12CH Dimmer Pack (Silicon Box)

Category	Specification
Model/ Name	12CH Dimmer Pack (Silicon Box)
Power Supply	Three-phase 5-wire, 50Hz
Input	Input
Output	12 × 16A (3-pin)
Channels	12 CH
Protection	125A main switch + overload & short circuit protection
Monitoring	Monitoring
Size	650 × 580 × 300 mm



Function Features

- 12-channel independent power control
- High-load capacity suitable for stage equipment
- Dual protection system (overload + short circuit)
- Built-in main leakage protection switch
- Real-time voltage monitoring (3-phase display)
- Stable and safe power distribution
- Designed for professional stage lighting systems
- Suitable for concerts, theaters, and large events



Led screen and Lighting Controls



H-9NOWA Controller



Function Features

- Advanced video wall processing for large LED display systems
- Supports multi-screen splicing and image mosaic
- High color depth for enhanced image quality
- Flexible input/output configuration for complex setups
- Supports PIP and image cropping functions
- Designed for control rooms, events, and LED video walls

Category	Specification
Model/ Name	NovaStar H-9NOWA
Series	H Series Video Splicing Processor
Control Type	Video Wall Processor
Video Wall Processor	Video Wall Processor
Max Resolution Support	Up to 4K (3840 × 2160)
Color Depth	18-bit
Outputs	4 × Ethernet Ports
Control Interface	USB / LAN

VX2000 Pro Controller

Category	Specification
Model/ Name	NovaStar-VX2000 Pro CVT-10S
Control Type	LED Video Processor
Max Resolution	3840 × 2160 @60Hz
Loading Capacity	Up to 13 Million Pixels
Refresh Rate Support	Up to 3840 Hz
Color Depth	16-bit
Control Software	NovaLCT / Unico Web



Function Features

- Supports 4K video input and high-resolution LED displays
- High loading capacity for large-scale LED screens
- Advanced image processing with multi-layer support
- High refresh rate output for smooth visual performance
- Compatible with NovaStar control ecosystem
- Suitable for events, stage setups, and fixed installations

VX600 Controller



Function Features

- All-in-one controller combining video processing and sending functions
- Supports medium to large LED display setups
- Compact 1U rack design for easy integration
- Reliable signal output via multiple Ethernet ports
- Compatible with NovaStar control software
- Suitable for events, rental setups, and fixed installations

Category	Specification
Model/ Name	NovaStar VX600
Control Type	All-in-One LED Controller
Max Loading Capacity	Up to 3.9 Million Pixels
Power Consumption	28 W
Control Interface	USB / LAN
Output Ports	Ethernet Ports
Installation	Rack Mount (19")

CVT4K-S Converter

Category	Specification
Model/ Name	CVT4K-S
Device Type	LED Fiber Converter
Transmission Type	Optical Fiber (Single Mode)
Transmission Distance	Up to 10 km (1310 nm)
Network Ports	16 × Neutrik Ethernet Ports
Fiber Interface	LC Fiber Interface
Control Interface	USB / Network
Power Input	AC 100–240V (PowerCON)



Function Features

- Long-distance signal transmission up to 10 km via fiber
- Stable data transfer for large LED display systems
- Multiple Ethernet outputs for high-capacity distribution
- Supports redundant fiber backup for reliability
- Professional PowerCON input for event environments
- Designed for large-scale LED walls and rental setups

CVT10-S Converter



Function Features

- Reliable fiber transmission for LED display systems
- Stable signal conversion for long-distance setups
- Compact design suitable for rack or fixed installation
- Simple integration with NovaStar control systems
- USB interface for configuration and control
- Ideal for rental, events, and permanent installations

Category	Specification
Model/ Name	NovaStar-CVT10-S
Device Type	LED Fiber Converter
Transmission Type	Optical Fiber
Control Interface	USB
Network Ports	Ethernet Ports
Installation	Rack / Fixed Installation
Dimensions	254 × 50 × 290 mm

Tiger Touch Plus Controller

Category	Specification
Model/ Name	Tiger Touch Plus
Device Type	Lighting Control Console
DMX Channels	6144 Channels
Output	4 × DMX Outputs
Control Interface	3-pin XLR
Display	Dual Touch Screens
System	Windows-Based System
Storage	i5 CPU / 120GB SSD / 4GB RAM



Function Features

- Professional lighting console for stage and event control
- Dual touch screens for fast and intuitive operation
- Supports up to 6144 DMX channels for complex setups
- Multiple DMX outputs for flexible fixture control
- Built-in system for show programming and playback
- Supports MIDI timecode for synchronized shows

Tiger Touch II Controller



Function Features

- Professional lighting console for stage and event control
- Touchscreen interface with physical faders for precise control
- Supports DMX512 protocol for wide fixture compatibility
- Compact console design for touring and rental use
- Suitable for small to mid-size lighting setups
- Reliable performance for live shows and events

Category	Specification
Model/ Name	Tiger Touch II
Device Type	Lighting Control Console
DMX Channels	DMX512
Output	Multiple DMX Outputs
Display	Single Touch Screen
Control Method	Touch + Faders
Installation	Console / Desk
Power Input	AC 220V

Akai APC40 MK2 Controller



Category	Specification
Model/ Name	Akai APC40 MK2
Device Type	MIDI Controller
Compatibility	Ableton Live
Connectivity	USB
Control Elements	5×8 RGB Clip Launch Grid (40 Pads)
Faders	8 Channel Faders + 1 Master
Software Support	Ableton Live
Compatibility	PC / Laptop (Windows)

Function Features

- Seamless integration with Ableton Live
- Real-time control of clips, effects, and mixer
- RGB pads provide visual feedback during performance
- Plug-and-play (no external power required)
- Compact and portable design
- Designed for DJs and live performers
- USB powered for easy setup
- Multi-purpose use for music and visual software



PVisual
Effects

Four head bubble fog machines

Category	Specification
Model/ Name	Four head bubble fog machines
Voltage	AC110–240V, 50–60Hz
Power	3000W
Control	DMX512 (8 channels), Remote / Manual
LED lighting	28 × 3W LED (4 colors)
Oil bottle capacity	1.2 liters



Function Features

- Combined smoke and bubble effect output
- Four-head design for wide coverage
- High-output performance for large-scale events
- Multiple control modes (DMX, remote, manual)
- Built-in LED lighting for enhanced visuals
- Large fluid capacity for extended operation

Smoke Gun



Function Features

- Moving head strobe with RGB matrix effect
- Pixel-style lighting for dynamic visual effects
- High-speed strobe with adjustable frequency
- Full RGB color mixing (wash + strobe effects)
- Multiple channel modes for advanced programming
- Supports RDM for remote configuration
- Smooth 32-bit linear dimming (0–100%)
- Ideal for stage, clubs, and visual shows

Category	Specification
Model/ Name	2000w smoke gun
Light Source	441 × 5050 RGB LEDs
Power	2000w
Voltage	220–240V
Effect Type	Smoke / Fog Effect
Control	Manual
Frequency	50/60Hz
Applications	Stage, Events, Clubs, Exhibitions

Visual Effects

Haze Machine 1500W



Category	Specification
Model/ Name	Haze Machine 1500W
Power Consumption	1500W
Voltage	AC220—240V, 50/60Hz
Pre-heating Time	5 min
Tank Capacity	3L
Output Distance	6—8 m
Control Modes	DMX / Remote / Timer
Weight	8.3 kg

Function Features

- Continuous haze output for stable atmosphere
- Adjustable spray angle for flexible coverage
- Digital display for easy operation
- Supports DMX, remote, and timer control
- Uses water-based haze fluid
- Fast heating with consistent performance
- Suitable for stage, events, and indoor venues
- Compact and portable design

6000W Smoke Machine + LED



Function Features

- Ultra high-power smoke output (6000W)
- Built-in LED lighting for visual effects
- Dense and long-range fog production
- Suitable for large stages and outdoor events
- Multiple control options (DMX / Remote / Manual)
- Fast heating with stable continuous output
- Combines smoke + lighting effect in one unit
- Ideal for concerts, festivals, and shows

Category	Specification
Model/ Name	Moving Strobe Light (RGB Matrix)
Power Consumption	6000W
Voltage	AC110—240V, 50/60Hz
Light Source	Built-in LED (RGB)
Control Modes	DMX512 / Remote / Manual
Output Type	High Power Smoke Output
Heating Time	Fast Heating System
Application	Stage / Events / Shows

Fog Machine 3000W



Category	Specification
Model/ Name	Fog Machine 3000W
Power Consumption	3000W
Voltage	110V / 220–240V
Heat-Up Time	6–8 minutes
Tank Capacity	5 Liters
Output	40000 cuft / min
Control	Wired / Wireless / Timer / DMX512
Weight	8.35 Kg

Function Features

- Ultra high-power 3000W for massive fog output
- Wide coverage with strong and dense smoke
- Multiple control options (DMX, remote, timer)
- Large 5L tank for longer operation time
- Stable and continuous performance
- Suitable for large events, stages, and shows

Fog Machine 1500W



Category	Specification
Model/ Name	700W Cold Spark Gun (Handheld)
Power Consumption	1500W
Voltage	AC110–120V
Frequency	55–60Hz
Control	Remote / Wired Control
Weight	6.5 Kg
Product Size	51 × 31 × 23 cm
Output	High-density fog

Function Features

- Powerful 1500W fog output
- Fast response and stable performance
- Easy control (remote & wired)
- Wide fog coverage for indoor use
- Compact and easy to carry
- Ideal for events, weddings, and stage effects

Moving Snow Machine + Flycase



Function Features

- High-output artificial snow effect
- Wide coverage up to 150 cubic meters
- Moving head design for directional control
- Strong airflow for realistic snow distribution
- Includes flight case for protection and transport
- Suitable for large events and outdoor use
- Stable performance for continuous operation
- Ideal for shows, festivals, and themed events

Category	Specification
Model/ Name	Moving Snow Machine + Flycase
Power Consumption	3000W
Voltage	AC110—220V, 50/60Hz
Control Modes	Wired Control
Snow Coverage	150 m ³
Product Size	860 × 800 × 130 mm
Weight	40 kg
Accessories	Power Cable / Screws / Manual

700W Cold Spark Gun (Handheld)

Category	Specification
Model/ Name	700W Cold Spark Gun (Handheld)
Power Consumption	700W Cold Spark Gun
Voltage	700W
Control Mode	Manual
Spray Height	Spray Height
Consumable	Consumable
Material	Iron
Weight	4.1 kg



Function Features

- Handheld cold spark effect (safe spark technology)
- Adjustable spark height up to 5 meters
- Easy manual operation (trigger control)
- Uses titanium powder for stable output
- Compact and lightweight for handheld use
- No open flame, suitable for indoor events
- Durable metal construction
- Ideal for weddings, shows, and celebrations

4000W Haze Machine



Function Features

- High-output haze for large venues
- Long spray distance up to 25 meters
- Large 10L tank for extended operation
- Dual control via DMX and wireless remote
- Adjustable fan and haze output (2-channel DMX)
- Built-in oil protection system
- Fast preheating (~5 minutes)
- Ideal for concerts, theaters, and large events

Category	Specification
Model/ Name	4000W Haze Machine
Power Consumption	4000W
Voltage	AC220–240V, 50/60Hz
Control Mode	DMX512 / Wireless Remote
DMX Channels	2 CH
Tank Capacity	10L
Output Distance	Output Distance
Weight	55.5 kg

paper machine

Category	Specification
Model/ Name	paper machine co2
Power Consumption	150W
Voltage	AC110–220V, 50/60Hz
Control Mode	DMX512
Consumable	Consumable
Jet Distance	Up to 15 m
Packing Size	101 × 47 × 94 cm
Weight	45 kg



Function Features

- High-power 1500W for strong fog output
- Fast heat-up for quick start
- Dense and wide fog coverage
- Easy to operate and control
- Stable performance for continuous use
- Compact design for easy transport
- Ideal for events, stages, and parties

paper gun



Function Features

- Handheld confetti shooting effect
- Manual trigger operation for easy use
- Spray distance up to 10 meters
- Compatible with electric confetti
- Lightweight and easy to handle
- Ideal for parties and stage shows
- Quick setup and operation
- Suitable for indoor event use

Category	Specification
Model/ Name	paper gun - Confetti Gun
Power Consumption	150W
Power Consumption	Manual
Consumable	E-Confetti
Jet Distance	8–10 m
Packing Size	97 × 31 × 26 cm
Weight	8 kg
Application	Stage / Events

Fog Machine 1500W RGB

Category	Specification
Model/ Name	1500w spary upward and direct spary fog
Power	1500W
Control	DMX512 / Remote control
Smoke Output	4000 cuft/min
Spray Height	8 – 10 meters
Preheating Time	~7 minutes
Fuel Tank Capacity	2.5L



Function Features

- Upward and direct fog spray effect
- Built-in RGB LED lighting (15 LEDs)
- Heating interval around 4 minutes
- Fuel consumption approx. 1L per 1.5 hours
- Stable output for large event environments
- Compact design with manageable weight

Stage Spark Machine (Cold Spark)



Function Features

- Cold spark effect (no open flame)
- Adjustable spark height based on setup
- Color digital display for control and monitoring
- Built-in powder cleaning system
- Supports height adjustment for different setups

Category	Specification
Model/ Name	Stage Spark Machine (Cold Spark)
Voltage	AC110–120V / AC220–230V
Power	500W
Fuse	4A / 8A
Effect Height	3 – 6 meters
Warm-up Time	~3 minutes
Temperature Control	Electronic constant temperature

Double Rotating Spark Machine

Category	Specification
Model/ Name	Dual Rotating Spark Machine
Spray height	1 – 5 meters (adjustable)
Power	1300W
Effect direction	Two nozzles at 20° angle
Hopper capacity	200g ×2
Consumables consumption rate	20 g/min ×2
Control	DMX controllable (2/4 channel switchable)
Spray direction	Rotate (X-axis 360°)
Preheating time	~3 minutes



Function Features

- Dual-head spark effect for wider coverage
- 360° rotating spray for dynamic movement
- Adjustable spray height based on setup
- Independent dual hopper system (200g ×2)
- Stable output with electromagnetic heating
- Durable aluminum housing
- Includes power and signal cables

Triple Head Flame Machine



Function Features

- Triple flame output for wider stage coverage
- Suitable for stage and outdoor effects
- Fast response flame effect
- Compact structure for easy placement
- Designed for synchronized show control

Category	Specification
Model/ Name	Triple Head Flame Machine
Working voltage	AC110V / 220V, 50/60Hz
Power	200W
Flame Height	Up to 3 meters (10 ft)
Control mode	DMX512 control
Net weight	10.2 kg
Product size	450 × 190 × 555 mm

3 head bubble machine

Category	Specification
Model/ Name	3 head bubble machine
Voltage	AC110–240V, 50–60Hz
Power	120W
Control mode	DMX512, remote control
Spraying height	Up to 16 meters
Output	3000 bubbles/second
Fuel tank capacity	2.8 liters
Running time	~55 minutes (full tank)
Frequency channels	6 channels



Function Features

- Triple-head design for wide bubble coverage
- High output suitable for large venues
- RGBW LED lighting effect
- 180° rotation angle for dynamic movement
- Durable aluminum alloy construction
- Suitable for indoor and outdoor events

Grasshopper Bubble Machine




Function Features

- Grasshopper Bubble Machine DMX
- Bubble Machine 90W RGBW DMX
- Compact Bubble Machine Stage DMX
- DMX Bubble Machine 6 Channel
- Small Bubble Machine Professional

Category	Specification
Model/ Name	Grasshopper Bubble Machine
Voltage	AC110–240V, 50/60Hz
Power	90W
Flame Height	Up to 3 meters (10 ft)
Control mode	DMX512, Remote Control
DMX512, Remote Control	Up to 11 meters
Channels	Channels
Light Source	LED 4W RGBW
Product Size	30 × 22 × 32 cm
Gross Weight	4 kg

CO2 with LED (3M High-pressure air tube)

Category	Specification
Model/ Name	CO2 with LED (3M High-pressure air tube)
Voltage	AC110–130V / AC220–240V, 50/60Hz
Power	60W
LED Light	12 × 3W RGB
Jetting distance	6 – 8 meters
Control way	DMX512
Machine Size	262 × 180 × 405 mm
N.W	11 kg

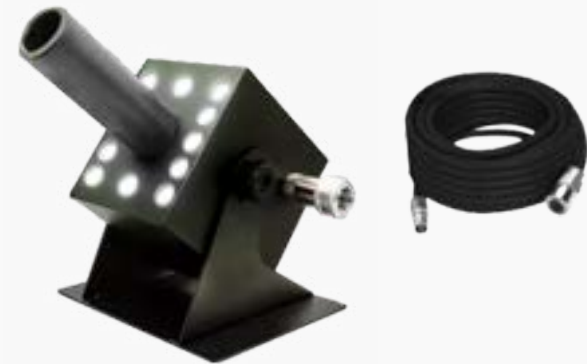

Function Features

- Combined smoke and bubble effect output
- Four-head design for wide coverage
- High-output performance for large-scale events
- Multiple control modes (DMX, remote, manual)
- Built-in LED lighting for enhanced visuals
- Large fluid capacity for extended operation

LED Air Cannon



Function Features

- Triple flame output for wider stage coverage
- Suitable for stage and outdoor effects
- Fast response flame effect
- Compact structure for easy placement
- Designed for synchronized show control

Category	Specification
Model/ Name	LED Air Cannon (CO2 gun – 3m High-pressure air tube)
Power	50W
Spraying Distance	8 – 10 meters
Light Source	LED full-color (3-in-1)
Net Weight	2.5 kg

Water Fog Machine

Category	Specification
Model/ Name	Water Fog Machine
Working voltage	AC220–240V, 50/60Hz
Power	1000W
Warm-up time	~3 minutes
Control	Wireless remote control
Control System	Independent channels with C20A protection
Drum volume	1.2L
Current limit insurance	15A / 250V



Function Features

- Low fog effect for stage and event environments
- Water-based fog output (clean effect)
- Fast warm-up for quick operation
- Built-in safety protection (oil-free protection)
- Automatic pumping system
- Compact design with flexible hose output

Air Dancer Blower



Function Features

- High-power 1100W fog output for strong stage effects
- Built-in RGB lighting for enhanced visual atmosphere
- Fast response with high-speed motor performance
- Compact design for easy placement on stage
- Suitable for events, concerts, and DJ setups
- Combines lighting and fog effects in one unit

Category	Specification
Model/ Name	Air Dancer Blower (1100W RGB Effect)
Power	1100 W
Voltage	230V / 60Hz
Motor Speed	3400 rpm
Output Pressure	850 Pa
Light Source	LED (RGB)
Cable Length	1.8 m
Application	Stage Effects

Air Dancer Blower

Category	Specification
Model/ Name	Air Dancer Blower(750W RGB Effect)
Power	750 W
Control Mode	Manual
Housing	Metal Body
Installation	Floor Mounted
Light Source	LED (RGB)
Cable Length	1.8 m
Application	Stage Effects



Function Features

- High-power 1100W fog output for strong stage effects
- Built-in RGB lighting for enhanced visual atmosphere
- Fast response with high-speed motor performance
- Compact design for easy placement on stage
- Suitable for events, concerts, and DJ setups
- Combines lighting and fog effects in one unit


FC-Air Dancer

Category	Specification
Model/ Name	FC-Air Dancer 01
Height Options	3 – 3.5 m
Material	Rip-stop Nylon
Blower Power	550 W
Shape	mulishape
Light Source	LED (RGB)
Application	Outdoor Promotion



Function Features


- Eye-catching inflatable design for promotional use
- Includes air blower for continuous movement effect
- Customizable colors and shapes for branding
- Lightweight and easy to install
- Durable rip-stop nylon material
- Ideal for events, shops, and outdoor advertising



Rigging And Staging



Stage Platform Panel

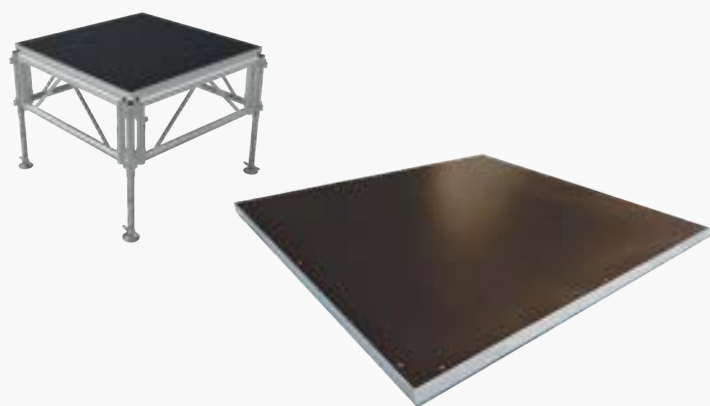

Function Features

- Anti-slip surface for safe stage performance
- Standard 1.22 × 1.22 m modular panel size
- Durable 18 mm board for heavy-duty use
- Strong steel frame for stability and load support
- Suitable for indoor stage and event setups
- Easy integration with modular stage systems

Category	Specification
Model/ Name	Stage Platform Panel
Size	1.22 × 1.22 m
Surface Material	Anti-slip Stage Board
Board Thickness	18 mm
Frame	Steel Frame (60 × 40 × 2 mm)
Finish	Black
Structure	Reinforced Panel
Application	Stage / Event Platforms

Stage Support Frame

Category	Specification
Model/ Name	Stage Support Frame
Size	1.22 × 1.22 m
Compatible Height	60–100 cm
Material	Steel
Profile	50 × 2 mm
Structure	Truss Frame



Function Features

- Designed to support modular stage platform panels
- Compatible with adjustable stage heights (60–100 cm)
- Strong steel structure for stability and load support
- Lightweight frame for easy handling and setup
- Suitable for event staging and rental applications
- Integrates with standard 1.22 m stage systems

Stage Stairs



Function Features

- Available in 4-step and 6-step configurations
- Anti-slip surface for safe stage access
- Strong steel structure for stability and durability
- Compatible with modular stage systems
- Easy setup and transport for rental use
- Suitable for events, exhibitions, and stage setups

Category	Specification
Model/ Name	Stage Stairs (4 / 6 Steps)
Steps Options	4 / 6 Steps
Structure Material	Steel (50 × 25 × 3 mm)
Step Material	Anti-slip Board
Board Thickness	18 mm
Surface Finish	Black Anti-slip
Material Type	PVC Surface
Application	Stage Access

Circular Aluminum Truss (Ring Truss)

Category	Specification
Model/ Name	Circular Aluminum Truss (Ring Truss)
Structure	Ring Truss
Ring Truss	Ring Truss
Brace Tube	Brace Tube
Brace Tube	Aluminum 6082-T6
Finish	Black
Connection Type	Connection Type
Application	Connection Type



Function Features

- Available in 4-step and 6-step configurations
- Anti-slip surface for safe stage access
- Strong steel structure for stability and durability
- Compatible with modular stage systems
- Easy setup and transport for rental use
- Suitable for events, exhibitions, and stage setups

Curved Aluminum Truss



Function Features

- Quarter circle truss for circular and curved stage designs
- Compatible with full ring configurations (4 sections)
- Strong aluminum structure with lightweight handling
- Professional finish for clean event appearance
- Suitable for lighting, LED screens, and rigging systems
- Ideal for exhibitions, concerts, and stage setups

Category	Specification
Model / Name	Curved Aluminum Truss
Shape	Quarter Circle
Diameter	3 m
Truss Size	400 × 400 mm
Main Tube	50 × 2 mm
Material	Aluminum
Finish	Sandblasted Silver
Application	Stage / Lighting Rigging

Straight Aluminum Truss

Category	Specification
Model/ Name	Straight Aluminum Truss
Material	Aluminum 6082-T6
Available Lengths	1 m / 2 m / 3 m
Main Tube	50 × 3 mm
Brace Tube	25 × 2 mm
Structure	Triangular Truss
Connection Type	Spigot / Pin Connection
Application	Lighting / Rigging



Function Features

- Available in multiple lengths for flexible stage setups
- High-strength aluminum (6082-T6) for durability
- Lightweight structure for easy transport and assembly
- Triangular design for strong load distribution
- Compatible with standard truss systems
- Ideal for lighting, LED screens, and event rigging

Aluminum Truss Tower Stand



Function Features

- Vertical truss tower design for mounting lighting equipment
- Strong aluminum structure for durability and lightweight handling
- Stable base for secure floor installation
- Sandblasted finish for professional appearance
- Suitable for mounting lighting fixtures and accessories
- Ideal for events, exhibitions, and rental setups

Category	Specification
Model/ Name	Aluminum Truss Tower Stand
Structure	Vertical Truss Tower
Main Tube	50 × 3 mm
Brace Tube	25 × 2 mm
Base	Floor Base Plate
Material	Aluminum
Finish	Sandblasted Silver
Application	Lighting / Rigging Support

Heavy Duty Line Array Speaker Stand



Function Features

- Vertical truss tower design for mounting lighting equipment
- Strong aluminum structure for durability and lightweight handling
- Stable base for secure floor installation
- Sandblasted finish for professional appearance
- Suitable for mounting lighting fixtures and accessories
- Ideal for events, exhibitions, and rental setups

Category	Specification
Model / Name	Speaker Stand
Structure	Vertical Lifting Stand
Height Range	1.9 – 6 m
Horizontal Arm	0.5 m
Load Capacity	250 kg
Net Weight	70 kg
Material	Steel
Tube Size	100 / 80 / 60 / 40 mm
Thickness	2.5 mm

Aluminum Truss Lectern



Category	Specification
Model/ Name	PD12-S
Product Type	Lectern Podium
Structure	Truss (Triangle)
Material	Aluminum 6061-T6
Height	1.2 m
Truss Size	290 × 290 mm
Main Tube	50 × 3 mm

Function Features

- Lightweight aluminum lectern with truss structure
- Professional design suitable for events and presentations
- Stable base for secure placement during use
- Available in silver or black finish
- Easy to transport and assemble
- Ideal for conferences, exhibitions, and stage use

U-Type Lighting Stand



Function Features

- 4-layer structure for mounting multiple lighting fixtures
- U-type frame design for organized lighting arrangement
- Heavy-duty base for stability during operation
- Equipped with wheels for easy movement and positioning
- Durable coated finish for long-term use
- Ideal for stage lighting setups and rental applications

Category	Specification
Model/ Name	U-Type Lighting Stand (4-Layer)
Structure	U-Type Frame
Layers	4 Layers
Base Size	550 × 1200 × 12 mm
Frame Size	780 × 520 mm
Main Tube	50 × 3 mm
Material	Steel / Aluminum Base
Mobility	With Wheels

DJ Booth Table

Category	Specification
Model/ Name	DJ Booth Table
Structure	Truss Frame
Main Tube	43 × 2 mm
Brace Tube	16 × 2 mm
Dimensions	1.6 × 0.69 × 1.2 m
Material	Steel
Color	Black
Application	DJ / Event Setup



Function Features

- Truss-style structure for professional event appearance
- Strong steel frame for stability and load support
- Compact size suitable for DJ equipment setup
- Open frame design for cable management
- Easy to transport and assemble
- Ideal for events, parties, and rental use

Adjustable Lighting Stand with T-Bar



Function Features

- Adjustable height for flexible lighting setup
- T-bar design for mounting multiple lighting fixtures
- Supports up to 10 lights for event configurations
- Stable tripod base for secure positioning
- Lightweight and portable for easy transport
- Suitable for events, stage lighting, and rental use

Category	Specification
Model / Name	Adjustable Lighting Stand with T-Bar
Height Range	1.6 – 2.8 m
Crossbar Length	1.5 m
Load Capacity	50 kg
Net Weight	12 kg
Mount Capacity	Up to 10 Fixtures
Structure	Tripod Stand
Application	Lighting Support



Event Production and Management

صناعة وإدارة الفعاليات

📍 Riyadh, Saudi Arabia ©2026 All content in this document is the intellectual property of the company and may not be reproduced or distributed without prior written permission.



info@litonevent.com



www.litonevent.com



0510 100 009



0510 100 006



@litonevent